

Start Panel LED Emergency

START PANEL LED 600 NW E3

0047410



Product features

- LED recessed IP44 panel - 600x600mm in 4000K Neutral White. Emergency 3hr. 4600lm delivered from 50W. 97lm/W total system efficiency. Even distribution of light throughout fixture. Long lifetime of 50,000 hours (L70).

PRODUCT OVERVIEW

Beam angle(°)	110
Certifications	CE
Colour temperature (K)	4000
Colour	White
EAN code	5410288474106
Luminous flux (lm)	4600
Housing	Powder coated steel + Aluminium
IK rating	IK02
IP rating	IP44
Light colour	Neutral White
LOR (%)	100
Mount	Ceiling recessed
Ordering number	0047410
Efficacy (Rated) (lm/w)	92
Average life (h) - L70/B50	50000
Technology	LED
Voltage (V)	220-240
Included lamp	Integrated LED
Compatible with bulbs of energy class:	A++ A+
Colour consistency (SDCM)	5 Step
Luminous flux (emergency) (lm)	400
Inrush Current (A)	14A
Inrush Duration	200µs
Photobiological Risk Group	Exempt Group 0

DATA TABLE

General data

Average life (h) at Ta 25° C	50000
Certifications	CE

Start Panel LED Emergency

START PANEL LED 600 NW E3

0047410

Control gear type	Electronic
EAN code	5410288474106
Environment	Internal
General application	Office; Retail; Hospitality
Housing	Powder coated steel + Aluminium
Mount	Ceiling recessed
Ordering number	0047410
Product name	START PANEL LED 600 NW E3
Average life (h) - L70/B50	50000
Technology	LED
Compatible with bulbs of energy class:	A++ A+
Product features	LED recessed IP44 panel - 600x600mm in 4000K Neutral White. Emergency 3hr. 4600lm delivered from 50W. 97lm/W total system efficiency. Even distribution of light throughout fixture. Long lifetime of 50,000 hours (L70).
What temperature Life is measured at (°C):	25

Optical data

Beam angle(°)	110
Colour temperature (K)	4000
Distribution type	Direct
Luminous flux (lm)	4600
Glare control	UGR<22
Light colour	Neutral White
LOR (%)	100
Colour consistency (SDCM)	5 Step
Luminous flux (emergency) (lm)	400
Photobiological Risk Group	Exempt Group 0

Physical data

Colour	White
Cutout diameter (mm)	600x600
Cutout shape	Square
Diffuser finish	Opal
Diffuser material	Polycarbonate
Emergency duration (h)	3
Emergency mode	Maintained
Height (mm)	86
IK rating	IK02
IP rating	IP44
Lamp included	Integrated
Length (mm)	596
Recessed depth (mm)	86

Start Panel LED Emergency

START PANEL LED 600 NW E3


0047410

Reflector finish	Polycarbonate Diffuser
Weight (kg)	3.55
Width (mm)	596
Included lamp	Integrated LED


Electrical data

Drive current (mA)	650
Electrical protection	CLASS II
Glow wire test	650°C
Efficacy (Rated) (lm/w)	92
Ta rating (°C)	-10°C to +40°C
Total power consumption (W)	50
Voltage (V)	220-240
Inrush Current (A)	14A
Inrush Duration	200µs

PHOTOMETRY

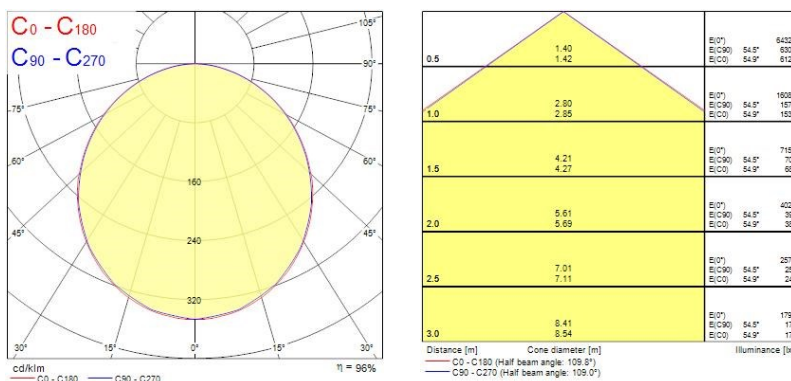

TECHNICAL DRAWINGS

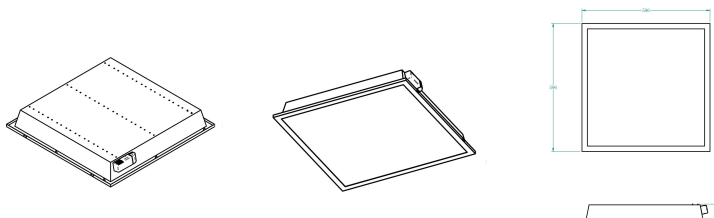



Start Panel LED Emergency

START PANEL LED 600 NW E3


0047410


SYLVANIA 0047410


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

SYLVANIA 0047410  874/2012